


EXTRA
NABUK
LEATHER

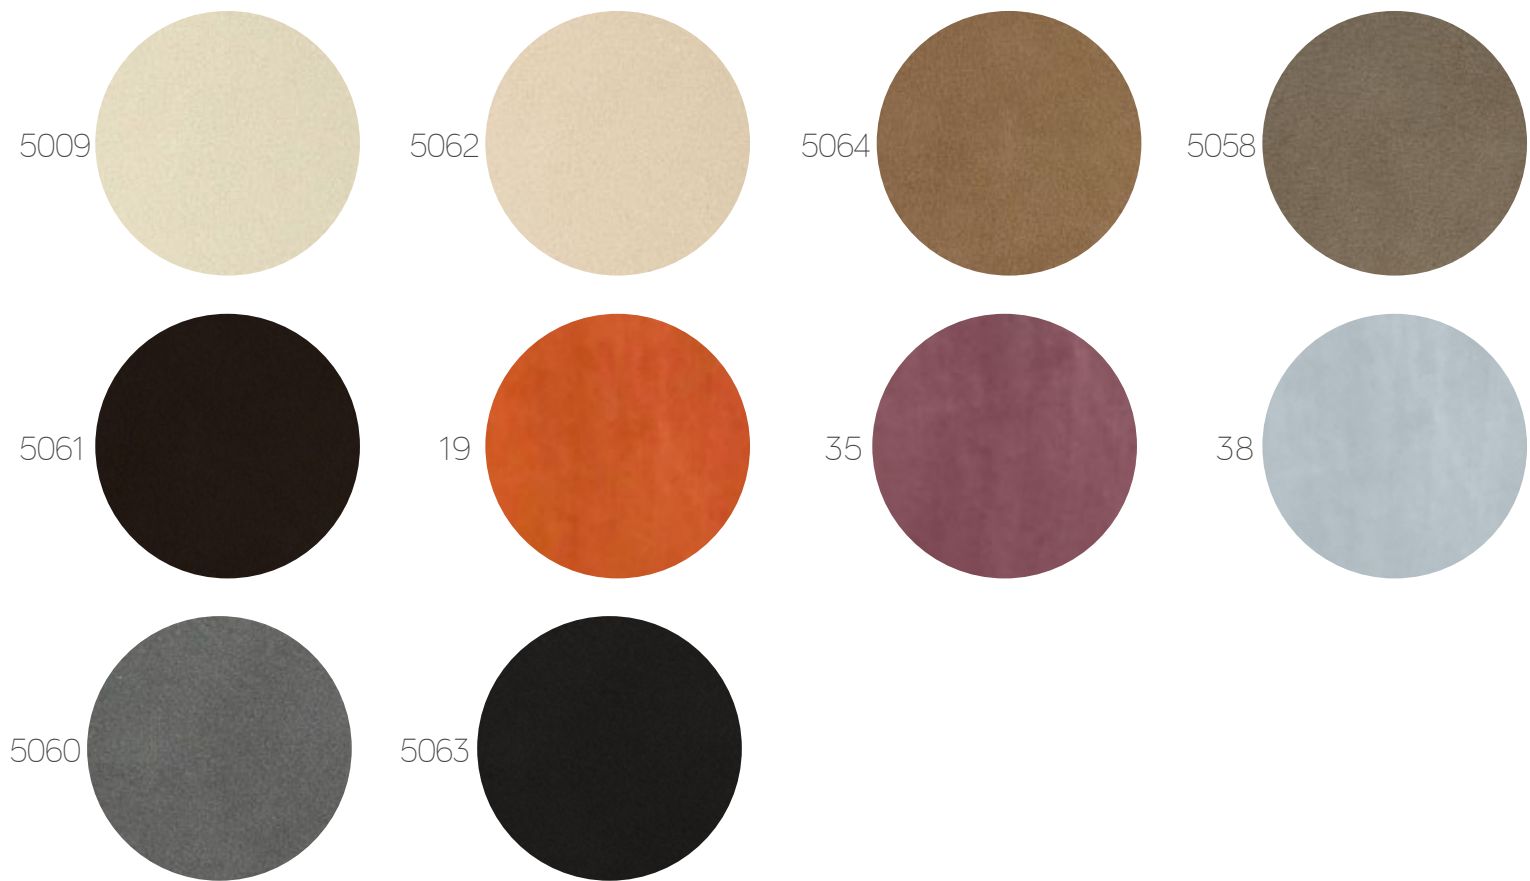

Thickness: 1,2 / 1,4 mm
Leather types: Nabuk
Raw material: European raw hides
Tannage: Chrome Tannage
Dyeing: Through dyeing Aniline
Fastness to light: ≥ 3 scala blu (UNI EN ISO 105-B02) | Tear resistance: ≥ 20 N (UNI EN ISO 3377-1)