


ORTISEI

BOUCLÈ



Composition: 45%CO 15%WO 13%AC 19%VI 8%NY
 Height: 140 cm | Weight: 950 gr/mtl | Pilling: 4 cycles (UNI EN ISO 12945-2)
 Dry washing: Warp -4,8/-4,4; Weft -3,1/-1,3 (UNI EN ISO 3175-2:2010) | Dry rubbing: Warp 4-5; Weft 4-5 (UNI EN ISO 105 X 12:2016)
 Wet rubbing: Warp 4-5; Weft 4-5 (UNI EN ISO 105 X 12:2016) | Strength of the seams: Warp 7,1mm; Weft 9,8mm (UNI EN ISO 13936-2:2014)
 Fastness to light: 5 (ISO 105B02 :2014) | Resistance to abrasion: 60.000 giri (ISO 12947-1:2000 - UNI EN ISO 12947-2:2017)
 Tear strength: Warp ND. N; Weft 194,5 N (UNI EN ISO 13937-3:2002) | Tensile strength: Warp 540 N; Weft 640 N (UNI EN ISO 13934-2:2014)

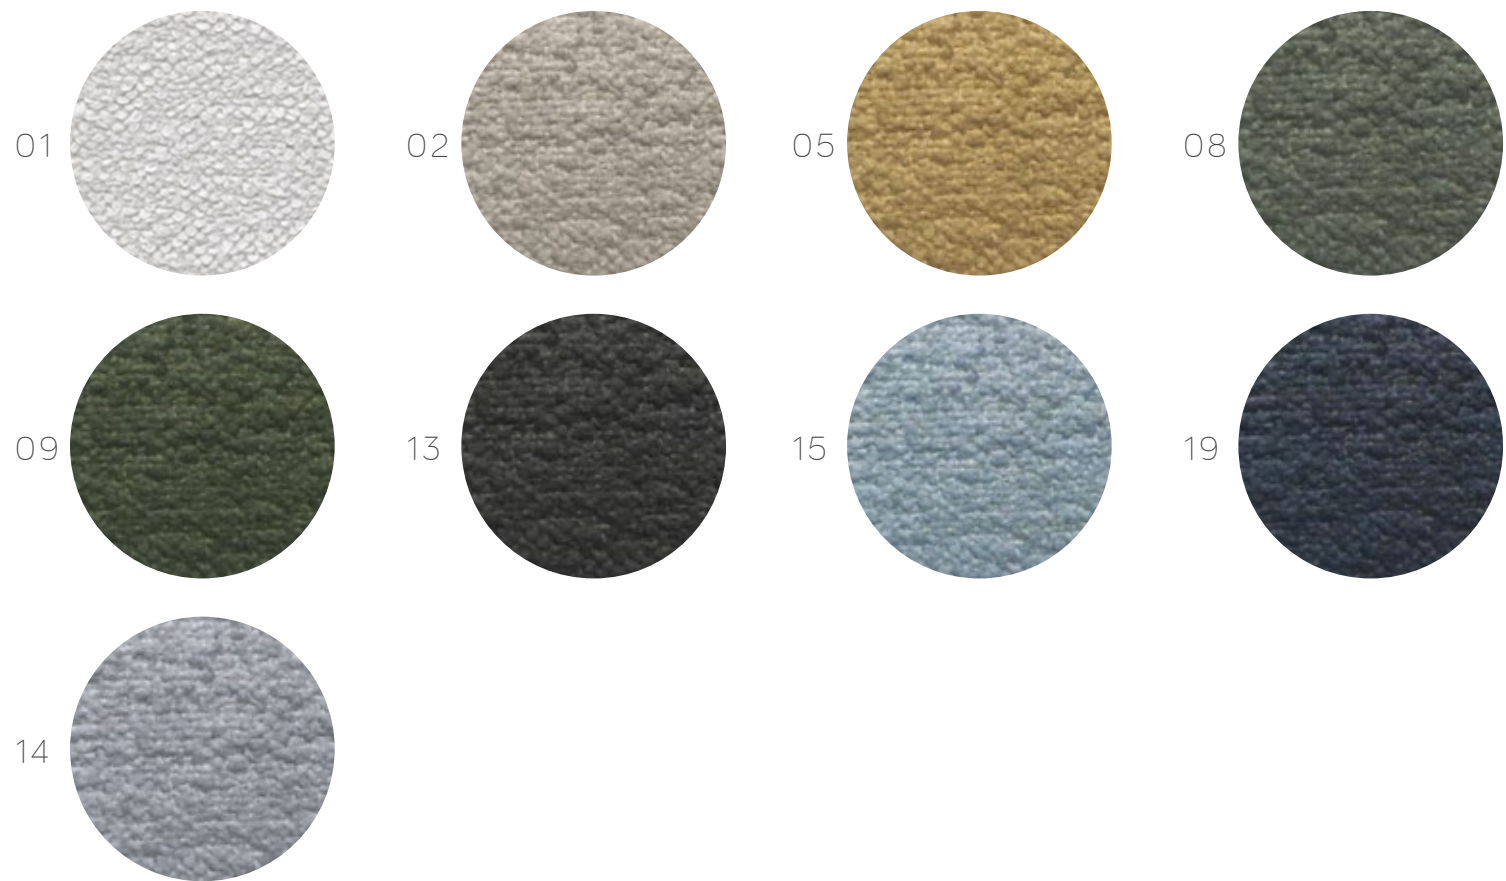